

- High Performance 8-Slot PXIe Backplane
- 7 Hybrid Compatible Slots
- Ultra-High Performance PCIe Switching With a Default Four-Link (4x4) System Slot
- High Data Bandwidth (Max. 16 GB/s System & 4GB/s Slot-to-Slot)
- Rear Panel External 10MHz Clock Input/ Output
- 400W Industrial Grade Power Supply
- Compact Benchtop Footprint
- Low Profile 4U Rugged Design
- Remote Chassis Monitoring System
- Low Audible Operating Noise
- 3 Year Warranty



Pickering Interfaces' 42-924 PXIe Chassis provides seven hybrid-compatible slots for application flexibility. The chassis utilizes a single PCI segment with a dedicated PCIe-to-PCI bridge module for the hybrid slots. The PXI specific high accuracy clocks and trigger signals are generated and controlled by an independent clock module attached to the rear of the backplane.

The chassis is fitted with a 400W industrial grade power supply mounted at the rear of the unit with sufficient capacity to support PXI modules with very high current demands.

An intelligent chassis management system monitors the power supply voltage, internal temperature and cooling fan speed. The current condition of the chassis can be monitored remotely via a port on the rear panel.

Two 80mm fans insure maximum PXI module cooling and an efficient direct convection design allows the chassis to operate over an extended ambient temperature range of 0°C to +50°C.



Rear of the 42-924 PXIe Chassis Showing Cooling Air Outlets, Reference Clock Connectors, Voltage Monitoring Port and Power Connector

Specifications

Number of Slots:	1 System slot with three expansion slots. 7 PXI Express Hybrid slots.
Bus Interface:	Four-link capacity PXI Express system slot. Up to 4 GB/s peripheral bandwidth to each slot. PXI-1 compatible with 32bit / 33MHz PCI bus.

Cooling

Airflow:	Front & bottom panel intake, rear exhaust.
Per-slot Cooling Capacity:	50W at 15K
Fans:	2 off 80mm fans - 152.3cfm

Power Supply

Input Voltage Range:	100 - 240VAC full range	
Input Frequency:	50 to 60Hz	
Supplied with a 400W DC output power supply with the following total capacity:		
DC Outputs	Max Current	Ripple
+3.3V	25A	±50mV
+5V	25A	±50mV
+5Vaux	1A	±50mV
+12V	15A	±100mV
-12V	2A	±100mV

Chassis Monitoring

Remote Interface:	Monitor port on rear panel
-------------------	----------------------------

Frequency Standard

Source:	Either 10MHz PXI compliant internal standard or external 10MHz standard applied to rear panel BNC connector.
---------	--

Mechanical Specification

Cardcage:	Front loading 3U x 160mm, 8 slots, IEEE 1101.1, 1101.10 and 1101.11
Dimensions:	Width: 245.5mm (9.67") Height: 177mm (6.97") Depth: 315mm (12.40")
Weight:	3.9kg (8.6 lbs) without PXI modules

Product Order Codes

8-Slot, 3U, PXIe Chassis	42-924-001
--------------------------	-------------------

Operating/Storage Conditions

Operating Conditions

(operating with specified airflow)

Operating Temperature:	0°C to +50°C
Humidity:	20% to 80% non-condensing

Storage and Transport Conditions

Storage Temperature:	-20°C to +70°C
Humidity:	10% to 90% non-condensing


Safety, CE & RoHS Compliance

All modules are fully CE compliant and meet applicable EU directives: Low-voltage safety EN61010-1:2001, EMC Immunity EN61000-6-1:2001, Emissions EN55011:1998.

The 42-924 Chassis also complies with the European Restriction of Hazardous Substances directive (RoHS).

Connectivity Solutions

We provide a full range of supporting cable and connector solutions for all our switching products—20 connector families with 1200+ products. We offer everything from simple mating connectors to complex cables assemblies and terminal blocks. All assemblies are manufactured by Pickering and are guaranteed to mechanically and electrically mate to our modules.



Connectors & Backshells



Multiway Cable Assemblies



RF Cable Assemblies



Connector Blocks

We also offer customized cabling and have a free online **Cable Design Tool** that can be used to create custom cable solutions for many applications.

Visit: pickeringtest.com/cdt to start your design.

Mass Interconnect

We recommend the use of a mass interconnect solution when an Interchangeable Test Adapter (ITA) is required for a PXI or LXI based test system. Our modules are fully supported by both Virginia Panel and MacPanel.

Pickering Reed Relays

We are the only switch provider with in-house reed relay manufacturing capability via our Relay Division. These instrument grade reed relays feature **SoftCenter™** technology, ensuring long service life and repeatable contact performance.

To learn more, please go to: pickeringrelay.com



Programming

Pickering provide kernel, IVI and VISA (NI & Keysight) drivers which are compatible with all Microsoft supported versions of Windows and popular older versions. For a list of all supporting operating systems, please see: pickeringtest.com/os

The VISA driver is also compatible with Real-Time Operating Systems such as LabVIEW RT. For other RTOS support contact Pickering. These drivers may be used with a variety of programming environments and applications including:

- **Pickering Interfaces Switch Path Manager**
- **National Instruments** products (LabVIEW, LabWindows/CVI, Switch Executive, MAX, TestStand, VeriStand, etc.)
- **Microsoft Visual Studio** products (Visual Basic, Visual C+)
- **Keysight** VEE and OpenTAP
- **Mathworks** Matlab
- **Marvin** ATEasy
- **MTQ Testsolutions** Tecap Test & Measurement Suite

Drivers for popular Linux distributions are available, other environments are also supported, please contact Pickering with specific enquiries.

We provide Soft Front Panels (SFPs) for our products for familiarity and manual control, as well as comprehensive documentation and example programs to help you develop test routines with ease.

To learn more about software drivers and development environments, please go to: pickeringtest.com/software

Signal Routing Software

Our signal routing software, Switch Path Manager, automatically selects and energizes switch paths through Pickering switching systems. Signal routing is performed by simply defining test system endpoints to be connected together, greatly accelerating Test System software development.

To learn more, please go to: pickeringtest.com/spm



Diagnostic Relay Test Tools

eBIRST Switching System Test Tools are designed specifically for our PXI, PCI or LXI products, these tools simplify switching system fault-finding by quickly testing the system and graphically identifying the faulty relay.

To learn more, please go to: pickeringtest.com/ebirst




Three Year Warranty & Guaranteed Long-Term Support

All standard products manufactured by Pickering Interfaces are warranted against defective materials and workmanship for a period of three years from the date of delivery to the original purchaser. Extended warranty and service agreements are available for all our modules and systems with various levels to suit your requirements. Although we offer a 3-year warranty as standard, we also include guaranteed long-term support—with a history of supporting our products for typically 15-20 years. To learn more, please go to: pickeringtest.com/support

Available Product Resources

We have a large library of product resources including success stories, product and support videos, articles, as well as complete product catalogs and product reference maps to assist when looking for the switching, simulation and cable and connector solutions you need. We have also published handy reference books on Switching Technology and for the PXI and LXI standards.

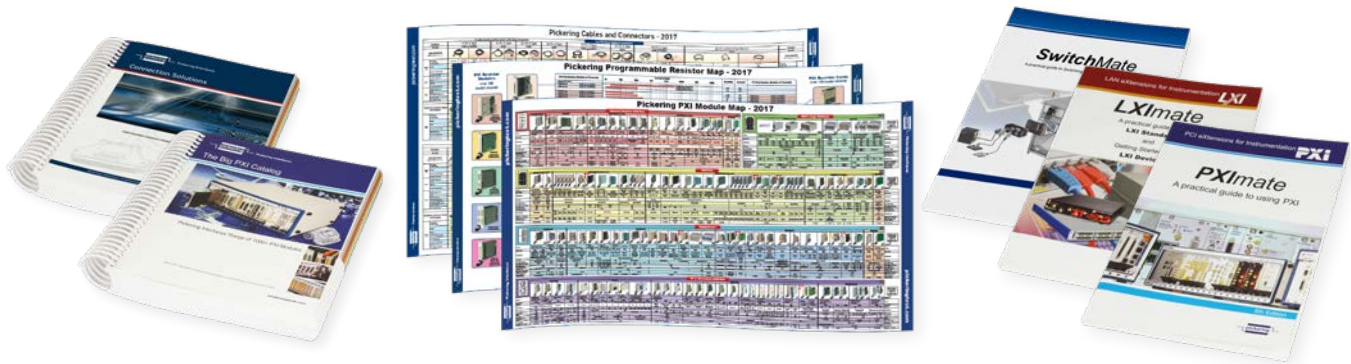

To view, download or request any of our product resources, please visit: pickeringtest.com/resources

© Copyright (2020) Pickering Interfaces. All Rights Reserved
Pickering Interfaces maintains a commitment to continuous product development, consequently we reserve the right to vary from the description given in this data sheet.